



**Commercial Sealants & Waterproofing**

Tremco offers corrosion-resistant fluid-applied flashing to prevent moisture from entering the wall cavity or penetration of water to the building structural framing components.

## Dymonic® 100 Flashing & Spectrem® Silicones

Fluid-Applied Flashing

### Basic uses





- Rough openings in both masonry and exterior sheeting applications
- Exterior window, door and sliding glass door openings
- Penetrations and termination of exterior wall assemblies
- Where wood-frame construction attaches to concrete
- At wall and roof intersections

### Benefits

- Can be applied to damp or green concrete
- Fast, UV stable cure
- Primerless adhesion to most substrates
- Corrosion-resistant flashing
- Single-lift application without mesh, laps or seams
- Proven, tested connectivity from wall to window
- Approved for use as per Florida Building Code 1405.4 and Residential Code R703.8



## FLUID-APPLIED FLASHING Dymonic® 100 and Spectrem® Silicones

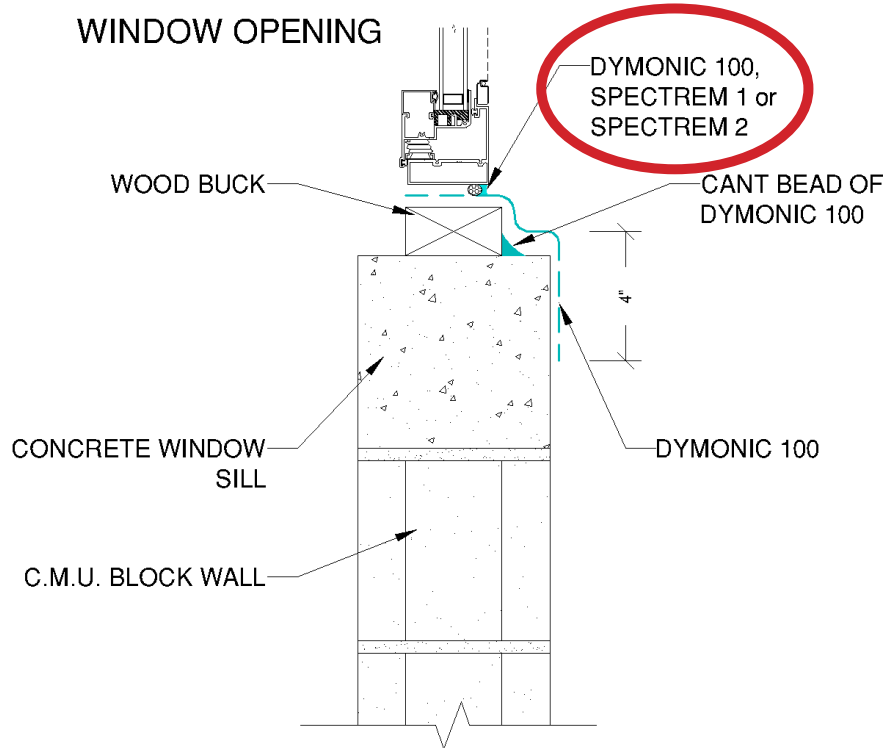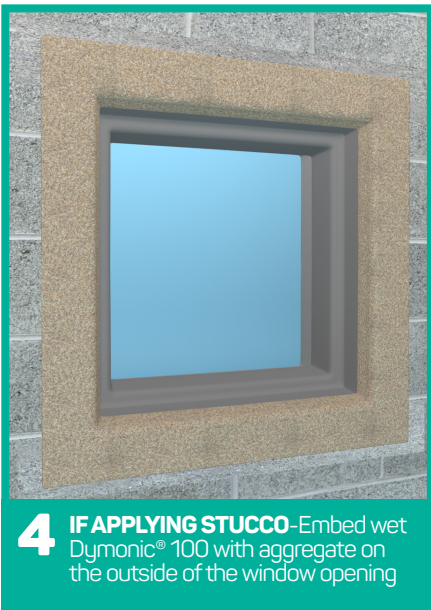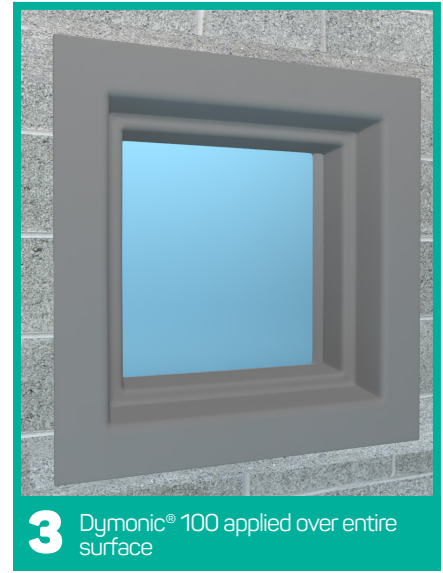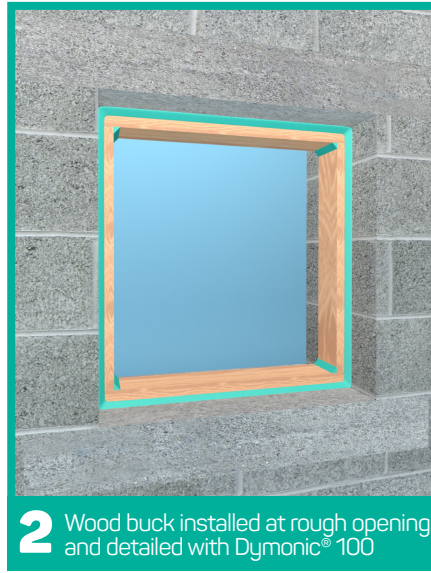

### DYMONIC® 100 APPLICABLE STANDARDS

**ASTM C920** Sealant Specification Class 50, Grade NS, Type S

**AAMA 714** Voluntary Specification for Liquid-Applied Flashing

**ASTM E2357** Air Leakage of Assemblies (applied as liquid-applied flashing in multiple assemblies)

**ASTM E331** Water Penetration of Assemblies (applied as liquid-applied flashing in multiple assemblies)

**NFPA 285** Fire Assembly Testing (applied as liquid-applied flashing in multiple assemblies)

**ASTM E84** Surface Burning Characteristics