

TREMPROOF® PUMA FLASHING SYSTEM

Designed for waterproofing penetrations, window flashing and block trails

Features & Benefits

- Minimal downtime (approximately 30 to 45 min) between application coats, even in cold temperatures.
- Polyurethane-methacrylate (PUMA) technology delivers extreme durability and crack bridging capabilities at critical connection points.
- Can be applied in temperatures as low as 14° F (-10° C)
- Absence of traditional reinforcing materials allows for a faster and simpler installation.
- Premium waterproofing system backed by an all-inclusive warranty.




*TREMPROOF® PUMA for
Flashing Applications*



TREMproof PUMA Flashing System

PRODUCT	COVERAGE RATE	MIN. WET MIL	COMMENTS
1: Dymonic® 100	N/A	N/A	
2: Tremco PUMA Primer	90 ft ² /gal	17	Lightly broadcast silica sand.
3: Tremco PUMA Flashing	27 ft ² /gal	60	Allow 45 min to cure.

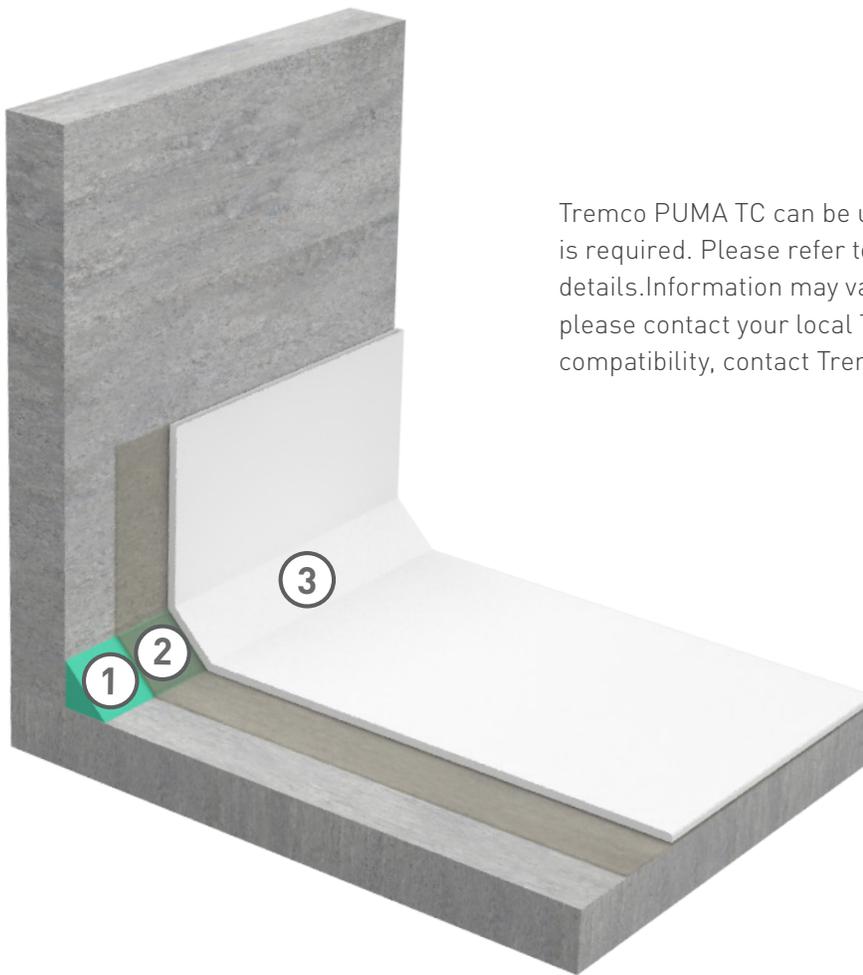

Tremco PUMA TC can be used when aesthetics or bonded overburden is required. Please refer to the application instructions for more details. Information may vary by region. For specific information, please contact your local Tremco representative. To confirm tie-in compatibility, contact Tremco Technical Service.

Tremco Commercial Sealants & Waterproofing | 3735 Green Road | Beachwood, OH 44122 | US: 800.852.9068 | CAN: 800.363.3213 | tremcosealants.com

Tremco Construction Products Group (CPG) brings together Tremco Incorporated's Commercial Sealants & Waterproofing and Roofing & Building Maintenance operating divisions; Dryvit Systems, Inc.; Nudura Inc.; Willseal; Weatherproofing Technologies, Inc. and Weatherproofing Technologies Canada, Inc.

 **TREMCO**
Construction Products Group

Tremco®, TREMproof® and Dymonic® are registered trademarks of Tremco Incorporated.
Use of the ® symbol indicates registration with the US Patent & Trademark Office and the Canadian Intellectual Property Office.

1220/TPPFSS

tremcocpg.com