ARCHITECTURAL WALL COATINGS

HDP[™] Water-Repellent Coating | Weatherlastic[™] Smooth | Demandit[®] Advantage Demandit[®] Sanded | Demandit[®] Smooth | Tuscan Glaze[™] | TREMGard[®] HB







Architectural Wall Coatings Designed to Beautify and Protect Your Structures

Dryvit[™] and Tremco[™] offer a complete family of architectural wall coatings designed to meet any performance, application, aesthetic or budget requirement.

Address efflorescence, chalking, peeling, cracking or flaking. Minimize the effects of water intrusion, mildew, mold, and dirt pickup. Transform your aesthetic with eye-catching finish options — from modern to classic.

The Tremco Construction Products Group Advantage

Dryvit and Tremco are now part of Tremco Construction Products Group (CPG). A stucture built with products from Tremco CPG companies means more for everyone – more satisfied contractors, more comfortable occupants or tenants, and more efficient structures and cost-effective operation for owners:



Faster Construction Time Dryvit and Tremco products can reduce production time and speed up in-field application to reduce construction schedules.



Stronger and More Resilient

Our systems are designed for maximum durability, many with service lives far surpassing that of competing systems.



Any Look You Want

A wide range of colors and finishes like brick, granite, metals, stucco and more provide maximum flexibility in your façade aesthetic.



Proven, Tested Compatibility

Products provide maximum protection from air, moisture and thermal infiltration — and are performance tested in our one-of-a-kind Sustainable Building Solutions Test Facility.



Cost Effective for the Long Term

A broad range of products can fit most project budgets — but our energy-efficiency and maintenance solutions can also help you ensure cost-effective ownership and operation for the long term.




One Point of Contact

Our products and systems are backed by industryleading warranties — all from a single point of contact. We can also help with everything from asset management to diagnostics to installer training.

The Symptoms (and Consequences) of Failing Exteriors

Rain, wind, snow, ultraviolet rays, and ineffective detailing will all take their toll on structures over time. Exterior deterioration eventually leads to even greater problems if not addressed. Unprotected exteriors and failing joints allow moisture intrusion and a multitude of other concerns, including — but not limited to — facade degradation, mold and mildew.

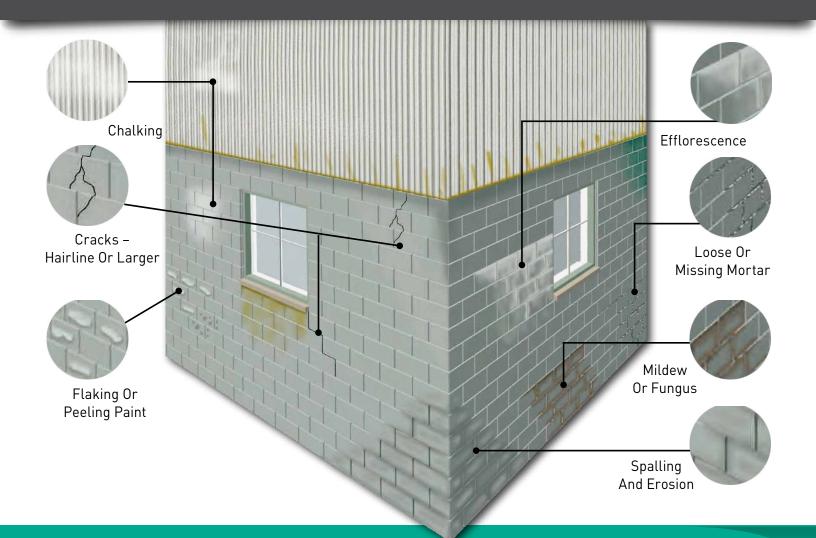

Dryvit and Tremco Solutions

Because of our industry-unique relationship, Dryvit and Tremco have the solutions to ensure compatible, tested systems from the foundation to the roof:

- Exterior Insulation Finishing Systems (EIFS)
- Flashing, Air and Vapor Barrier Systems
- Pre-Compressed Foam Expansion Joint Products
- Sealants, Adhesives and Pre-Formed Transition Assemblies
- Insulated Concrete Form (ICF) Systems
- Commercial Glazing Sealants, Tapes and Extrusions



HDP[®] WATER-REPELLENT COATING

HDP[™] Water-Repellent Coating is 100% acrylic, has excellent water-repellent properties and is available in standard colors as well as custom colors. HDP Water-Repellent Coating is formulated to resist mold and mildew growth (PMR) and is hydrophobic, resulting in less dirt pick-up and a cleaner wall.

Without HDP technology, water droplets hit an exterior wall, flatten and cling to the surface until evaporation occurs. Frequently these same water droplets contain atmospheric dirt and contaminants, which can create an environment conducive to the growth of microbes such as mold and mildew — which are unsightly and, if not removed, can potentially harm almost any exterior surface.

Dryvit HDP Coatings utilize both state-of-the-art silicone technology and fractal geometry to enable wall surfaces to repel water — allowing them to dry faster and slow the accumulation of dirt and other contaminants.

Features & Benefits

- Hydrophobic chemistry repels water and takes dirt with it
- Ideal for both new construction and renovation
- Resists mold and mildew growth

Common Applications

HDP Water-Repellent Coating is used to coat acrylic based textured finishes, masonry, stucco, wood, or primed metal.







After pressure washing the entire building below, HDP Coating was applied to only the left portion of the building. Five years later, it is still clean while the right side — without HDP Coating shows the wear from normal environmental conditions.



WEATHERLASTIC[®] SMOOTH

Weatherlastic[®] Smooth is a water-based elastomeric wall coating. It is easily applied with an airless spray or roller. Weatherlastic Smooth is based upon a 100% acrylic, copolymer elastomeric resin, which provides excellent elongation and flexibility at low temperatures. The coating resists mildew growth and dirt pickup and is highly chalk-resistant.

Features & Benefits

- Elastomeric formulation bridges hairline cracks
- Dirt Pickup Resistance (DPR) means walls stay cleaner longer
- Mildew-resistant
- Plasticizer-free, and with low temperature flexibility for maximum crack-resistance

Common Applications

Weatherlastic Smooth is recommended as a waterproof coating on properly prepared concrete, masonry, EIFS and stucco substrates.







DEMANDIT[®] ADVANTAGE

Demandit[®] Advantage is a 100% acrylic high-performance coating with a satin sheen finish, and employs StratoTone[™] colorant technology. Demandit Advantage is offered in all standard, as well as custom colors, offers excellent stain resistance and contains the most effective ingredients available to resist mold and mildew growth (PMR) on the surface of the coating.

Features & Benefits

- High level of acrylic resin for maximum stain resistance
- StratoTone pigments provide increased fade resistance
- DPR/PMR chemistry resists dirt-pickup, mold and mildew
- Vapor-permeable: will not trap moisture vapor
- Cleans quickly and easily with only water

Common Applications

Demandit Advantage is equally suited for new construction of renovations to recoat, protect and redecorate EIFS, primed concrete, masonry, stucco, wood and metal.







DEMANDIT[®] SMOOTH

Demandit [®] Smooth is a 100% acrylic coating, which is offered in a variety of standard and custom colors. Demandit Smooth contains the most effective ingredients available to help resist mold and mildew growth (PMR).

Features & Benefits

- 100% acrylic formulation extends the life of re-coated surfaces
- DPR/PMR chemistry is resistant to dirt-pickup, mold and mildew
- Vapor-permeable: will not trap moisture vapor
- Can be applied by brush, trowel, or sprayer
- Cleans quickly and easily with only water

Common Applications

Demandit Smooth is a durable coating, which may be used to change the color of an existing Dryvit or other acrylic-textured finish. It can also be used to protect and decorate concrete, masonry, stucco, wood, primed metal and more.





DEMANDIT[®] SANDED

Demandit [®] Sanded is a 100% acrylic coating, which is offered in a variety of standard and custom colors. Demandit Sanded contains the most effective ingredients available to help resist mold and mildew growth (PMR).

Features & Benefits

- 100% acrylic formulation extends the life of re-coated surfaces
- DPR/PMR chemistry is resistant to dirt-pickup, mold and mildew
- Vapor-permeable: will not trap moisture vapor
- Can be applied by brush, trowel, or sprayer
- Cleans quickly and easily with only water

Common Applications

Demandit Sanded is a durable coating, which may be used to change the color of an existing Dryvit or other acrylic-textured finish. It can also be used to protect and decorate concrete, masonry, stucco, wood, primed metal and more.





TUSCAN GLAZE®

Tuscan Glaze[®] is used as an antique stain to simulate century-old plaster, and was designed to obtain a faux or "mottled" appearance on Dryvit finishes. Tuscan Glaze works best when applied over fine aggregate finishes, such as Freestyle[®], Lymestone[™] and Weatherlastic[®] Adobe. It is available in 12 standard colors.

Features & Benefits

- Can be applied over many textures for a fully-customizable look
- 12 standard colors ensure consistenccy
- 100% acrylic formula is easy to use and apply

Common Applications

While Tuscan Glaze is often used in residential applications, it has also been successfully used on commercial projects, especially in the retail, hospitality and entertainment industries in which uniqueness and specific architectural appearance are highly-valued.







TREMGARD[®] HB

TREMGard[®] HB is a high-build, fiber-reinforced, water-based, acrylic wall coating formulated to provide a tough, durable, flexible, and breathable film protection for concrete and masonry surfaces. TREMGard HB can be applied in a single coat up to 32 wet mils and can be used to bridge cracks.

Features & Benefits

- Resists the effects of water and weather, making it an ideal coating for long-lasting waterproofing protection
- Fiber reinforced for added strength and durability
- Bridges hairline cracks
- Resists the growth of mold and fungus
- VOC compliant @ <100 g/L

Common Applications

- Concrete, cast-in-place or pre-cast CMU
- Previously painted masonry
- Brick and stone

- EIFS
- Stucco
- Metal and PVC (with primer)







DYMONIC[®] 100

Dymonic[®] 100 is a high-performance, high-movement, single-component, medium-modulus, low-VOC, UV-stable, non-sag polyurethane sealant. It is a durable, flexible sealant that offers excellent performance in moving joints and exhibits tenacious adhesion once fully cured.

Features & Benefits

- Can adhere to damp or green concrete and has a skin time of 2 hr with a tack-free time of 6 to 8 hr to significantly reduce dirt attraction.
- Movement capability of +100/-50% in typical field conditions, is low VOC, paintable, jet fuel-resistant, and will not crack, craze or yellow under extreme UV exposure
- Suitable for water immersion and will not out gas

Common Applications

- Expansion and control joints,
- Precast concrete panel joints
- Window, door & panel perimeter caulking
- Aluminum, masonry and vinyl siding

DYMONIC[®] SIMPLE SEAL

Dymonic[®] Simple Seal is a medium-modulus, preformed polyurethane extrusion specifically designed to bridge joints under elastomeric wall coatings. Dymonic Simple Seal is bonded with Dymonic[®] 100 polyurethane sealant to a wide range of substrates to provide a watertight seal.

Features & Benefits

- Easy installation reduces time and labor costs
- Superior flexibility and +/- movement capabilities
- High strength provides durability and excellent tear resistance

Common Applications:

- Expansion joints
- Window/door perimeters
- Dryvit / EIFS joints
- Parapet walls

- Transition seals
- Curtain wall joints
- Other joints that will be coated with an elastomeric coating







PUWER of ONE

One Building Envelope. One Warranty. One Powerful System Delivering Unmatched Protection.

Why a Single Source Matters

Why risk cobbling together the envelope with materials from dozens of different suppliers, when you can choose a Tremco Construction Products Group (CPG) building envelope — designed and tested to work as one continuous system and warranted together in a single document? That's one warranty document handed over to building owners at the completion of any project, and one call if a problem ever arises.

That means fewer call-backs. And access to a range of technologies that will speed construction, simplify installation and lengthen the construction season. In the unlikely event of product defect, we will also cover associated labor costs to make the necessary repair.

Systems & Services Covered Under a Single Warranty

- Air & Vapor Barriers
- Cladding
- Glazing Systems
- Insulated Concrete Forms



- Sealants & Adhesives
- Traffic Coatings
- Waterproofing

BUILDING ENVELOPE

Comprehensive Protection for Your Building Envelope

WARRANTY NUMBER: [Issuer Identifier/Project Number]-[Warranty Number]

PROJECT NAME & ADDRESS:		CONSTRUCTION MANAGER:	
OWNER:		GENERAL CONTRACTOR:	
ARCHITECT/ ENGINEER:		AGGREGATE MATERIAL PURCHASE VALUE:	
ISSUER (THE "COMPANY"):	[List all manufacturers/ sellers of Products listed in the Exhibit. For example, Tremco Incorporated, Dryvit Systems, Inc., The Euclid Chemical Company, etc.]	DATE OF PROJECT SUBSTANTIAL COMPLETION:	

WHAT IS WARRANTED AND WHAT WILL THE COMPANY DO?

Subject to the terms, conditions, and limitations stated in this warranty, the products (the "Products") will be free from manufacturing defect at the time of purchase, will remain in a watertight condition and will perform as warranted in the manner specified for the stated term() measured from the Date of Project Substantial Completion, all as outlined on the attached Exhibit. The Exhibit is an integral part of this warranty.

THE COMPANY WILL SUPPLY LABOR AND MATERIALS TO REPAIR OR REPLACE ANY PRODUCTS THAT DO NOT PERFORM AS WARRANTED HEBEUNDER. The Company will determine in its sole discretion the appropriate scope and method of repair or replacement to remedy any condition covered by this warranty.

The total liability of the Company over the life of this warranty shall not in any event exceed the aggregate dollar value of the original cost of the Products specified in the attached Exhibit.

he term of this warranty may be extended for an additional 2 years with involvement on the project of Company approved, third-party consultant ("Consultant") engaged by the Owner or its authorized expresentative, at the Owner's sole expression. Inspection proofs generated by the Consultant in table les made available to the Company and the Owner. All deficiencies identified by the Consultant in the inspection reports must be addressed and corrected in accordance with the project specifications, good waterproofing practices generally accepted in the industry, and the Company's published application instructions. Without confirmation that all deficiencies have been addressed and corrected must be determined in the set of t

TREMCO

"One family of companies, by one contractor. It just really makes our life easier — and it makes our projects better.

500 Pacific Ave. Bremerton, Washington

Dryvit Air Barriers and Prefabricated Panels Tremco Traffic Coatings and Sealants



Scan or click to see the full case study



Tryvit TREMCO

Part of Tremco Construction Products Group

Dryvit Systems, Inc. | One Energy Way | West Warwick, RI, 02893 | US: 401.822.4100 | dryvit.com Tremco Commercial Sealants & Waterproofing | 3735 Green Road | Beachwood, OH 44122 | US: 800.852.9068 | CAN: 800.363.3213 | tremcosealants.com

Tremco Construction Products Group (CPG) brings together Tremco Incorporated's Commercial Sealants & Waterproofing and Roofing & Building Maintenance operating divisions; Dryvit Systems, Inc.; Nudura Inc; Willseal; Weatherproofing Technologies, Inc. and Weatherproofing Technologies Canada, Inc.



Construction Products Group

Tremco® is a registered trademark of Tremco Incorporated. Willseal is a registered trademark of Use of the ® symbol indicates registration with the US Patent & Trademark Office and the Canadian Intellectual Property Office.